

Air to Air Thermoelectric Assembly




ATS PART# ATS-WFF-200W-24-C

ATS' air to air thermoelectric assemblies are heat exchangers that remove heat from an enclosure and are designed for temperature regulation of small electronic cabinets or enclosures. They are often used when it is better to circulate cooled air rather than use direct contact with a cold plate.

FEATURES & BENEFITS

- » Compact and lightweight
- » Can be mounted in any orientation
- » No compressor
- » Virtually maintenance free
- » Simple quick installation
- » Air to air heat exchanger
- » Quiet operation
- » Uses thermoelectrics

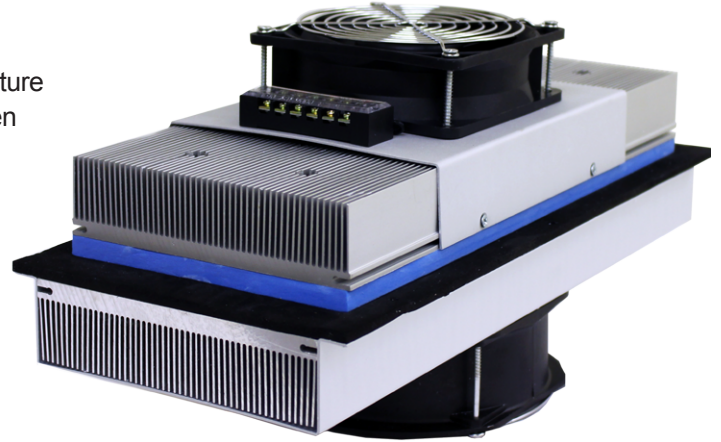


For Illustration Purposes ONLY.

SPECIFICATION

Max Cooling power 145W @ $\Delta T = 0^\circ\text{C}$
 TEC Voltage 24 VDC
 TEC Current Start 13.5 A / Working 11.5 A
 Fan Voltage 24 VDC


APPLICATIONS

- » Enclosure or cabinet cooling
- » Electronics cooling
- » Medical, surgical and biological process cooling
- » Thermal management
- » Medical equipment
- » Refrigerators and water coolers
- » Industrial storage and food transportation

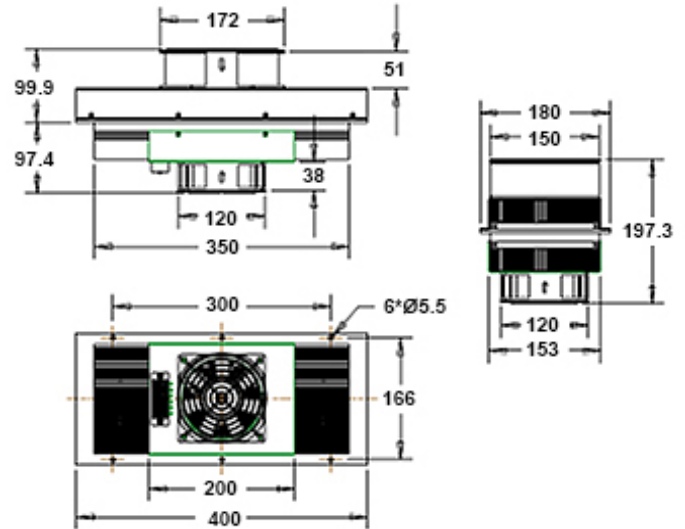

Product Detail

Max Cooling Power	TEC Voltage	TEC Current	Hot Side Fan	Cold Side Fan	Operating Temperature	Dimensions (mm)	Mounting Holes (mm)	Weight
145W	24V	11.5A	172x150x51 mm 24V, 0.6A	120x120x38 mm 24V, 0.5A	-10° – 70°	400x180x197.3	300x166	7.1 Kgs

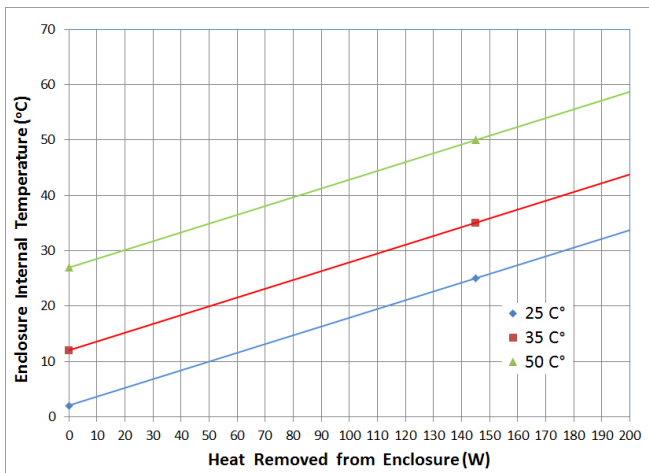

NOTES:

1. Please use the 24 VDC power supply with the ripple less than 10%
2. Please do not drop, otherwise TECs can get damaged.
3. Please keep 10 cm distance from walls for proper ventilation when mounting.
4. Please do not use when the temperature of the assembly or environment is higher than 70°C.
5. Graph shows an example of when cabinet temperature is 50°C and the environment temp is 50°C, the cooler can transfer 145W from the cabinet to the ambient.
6. $\Delta T = T_{\text{enclosure}} - T_{\text{ambient}}$



ATS ADVANCED THERMAL SOLUTIONS, INC.
 Innovations in Thermal Management®